

63-21-00

PTO/SB/05 MODIFIED BY AT&amp;T CORP.

A

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	<b>Attorney Docket No.</b>	1999-0558	<b>Total Pages</b>	36
	<b>First Named Inventor or Application Identifier</b>			
	Barry McKay Crooks			
	<b>Express Mail Label No.</b>	EL487592676US		

**APPLICATION ELEMENTS**  
See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO:** Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

jc777 U.S. PTO  
03/20/00

1. ☒ **Fee Transmittal Form**  
(submit an original, and a duplicate for fee processing)

2. ☒ **Specification** [Total Pages 25]  
(preferred arrangement set forth below)

- Descriptive title of invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings(if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ **Drawing(s)**(35 USC 113) [Total Sheets 4]

4. **Oath or Declaration** [Total Pages 2]

a. ☒ Newly executed (original or copy)

b. ☐ Copy from a prior application(37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b)

☐ **Incorporation by reference**(useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath  
or declaration is supplied under Box 4b, is considered as being part of the  
disclosure of the accompanying application and is hereby incorporated by  
reference herein.

6. ☐ Microfiche Computer Program *(Appendix)*

7. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy(identical to computer copy)

c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

8. ☒ Assignment Papers(cover sheet & document(s))

9. ☐ 37 CFR 3.73(b)Statement ☐ Power of Attorney

10. ☐ English Translation Document *(if applicable)*

11. ☐ Information Disclosure ☐ Copies of IDS  
Statement(IDS)/PTO-1449 Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☐ Other :

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No:

**18. CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

<b>NAME</b>	Samuel H. Dworetsky				
<b>ADDRESS</b>	AT&T CORP. P.O. Box 4110				
<b>CITY</b>	Middletown	<b>STATE</b>	New Jersey	<b>ZIP CODE</b>	07748-4110
<b>COUNTRY</b>	United States of America	<b>FAX</b>	732-368-6932		

**19. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

<b>NAME</b>	Alfred G. Steinmetz	<b>Reg. #</b>	22971
<b>TELEPHONE</b>	973-360-8113		
<b>SIGNATURE</b>		<b>DATE</b>	March 20, 2000

"Express Mail" Mailing Label Number EL487592676US

Date of Deposit 03/20/2000

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington D.C. , 20231

Ann E. Taylor  
(Printed Name of Person Mailing Paper)

(Signature of Person Mailing Paper)

## **CONFIGURATION MAPPING IN AN ATM-BASED WIDE AREA NETWORK**

### **Related Applications**

5        This application is related to the co-pending U.S. application entitled  
“CONFIGURATION IDENTIFICATION AND MAPPING IN A FRAME RELAY-ATM  
SERVICE INTERWORKING-BASED WIDE AREA NETWORK” and is assigned to  
the owner of that application.

### **Field of the Invention**

10        The present invention relates to a configuration mapping method and apparatus in  
a network having multiple local-area networks (LANs) connected by an ATM-based  
wide-area network (WAN).

### **Background of the Invention**

15        The success of the modern business enterprise depends heavily on the computing  
and communications infrastructure that supports it. This infrastructure is considered a  
strategic asset by businesses, and has changed dramatically over the years as a result of  
the evolution in data processing and telecommunications. Because of recent advances in  
20    computing and telecommunications, companies are rapidly adopting new ways of doing  
business, with the end result that mission critical applications and operations have moved  
onto the network and are increasingly dependent on new networking paradigms.

These new applications generally have some fundamental differences from earlier data applications. First, they demand much higher bandwidth because the amount of traffic generated by them is so much greater. Second, there is a greater need for network connectivity among a much larger end-user population. Where, in the past, the network simply connected internal, specialized functional areas, the modern network interconnects virtually everyone within the corporate structure. Traditional methods of connecting occasional users to the network involve the use of dial-up lines of relatively low speed, which are not satisfactory for meeting today's connectivity requirements.

Another characteristic of the modern business is that it often comprises multiple geographically dispersed locations. In addition, many firms permit or even encourage telecommuting. Newer network services, such as ATM, make these practices possible. In particular, ATM makes it possible for such far-flung enterprises to exchange information rapidly and effectively.

One example of the use of ATM technology is as part of a wide-area network (WAN) that is used to interconnect and seamlessly integrate multiple remote local area networks (LANs) to form an enterprise intranet. One advantage of this scheme is that the WAN is transparent, and the distributed LANs function as a single LAN from the perspective of the end-user. However, there is a significant disadvantage to this scheme. Because the WAN is transparent, the managers of the LANs cannot diagnose faults within the WAN. Therefore, a LAN manager cannot determine whether a network fault lies

within the LAN or within the WAN. Additionally, WAN reported faults cannot be correlated to the associated LAN components.

### Summary of the Invention

5 According to an illustrative embodiment of the invention, a destination local area network (LAN) and a local LAN are coupled by an ATM-based wide area network (WAN). Each of the LANs includes a router, and the WAN includes at least two ATM switches having customer switch ports. One or more ATM interfaces are configured on each router. The interface on the router of the local LAN and the interface on the router  
10 of the destination LAN form an interface end-point pair. In order to identify a connection between the destination LAN and the local LAN, an end-to-end LAN-WAN-LAN connection components template is created. The template contains a number of fields, which are populated during the process of identifying the end-point to end-point connection.

15 ATM interfaces are identified on each router. The network addresses conform to Internet Protocol (IP) and are part of the same subnet. The IP address, IP subnet mask, city, state and the VPI/VCI ("virtual circuit identifier") value are retrieved from each of the ATM interfaces, and those values are stored to create a list describing the physical and logical characteristics of the ATM interface. A pair of network addresses is identified  
20 using the IP address in conjunction with the subnet mask stored for each ATM interface in the list. The virtual circuit identifier values associated with each of the network IP

addresses are identified. WAN configuration data are retrieved and prepared so as to permit LAN-to-WAN correlation. Preparation involves the capitalization of all characters in the city and state names in the list of ATM interfaces, and the manipulation by algorithm of the characters forming the city name, which limits its final length and which excludes specific character types such as vowels from the resultant string. The city, state and pair of virtual circuit identifier values of the ATM interfaces on the LANs are associated with the city, state and pair of virtual circuit identifier values on the WAN. The associated configuration information and components of the WAN are retrieved and stored alongside entries in the list of ATM interfaces.

Further features and advantages of the present invention, as well as the structure and operation of various embodiments of the present invention are described in detail below with reference to the accompanying drawings. In the drawings, like reference numbers indicate identical or functionally similar elements. Additionally, the left-most digit(s) of a reference number identifies the drawing in which the reference number first appears.

### **Brief Description of the Drawings**

FIG. 1 illustrates an ATM-based communications network.

FIGS. 2 and 3 schematically illustrate ATM interfaces of local and destination LANs in the communication network depicted in FIG. 1.

FIG. 4 is a flow chart depicting the topology discovery process of the present invention according to a preferred embodiment.

FIG. 5 is a block diagram of an example computer system for implementing the present invention.

5

### Detailed Description of the Invention

The preferred embodiment is discussed in detail below. While specific steps, configurations and arrangements are discussed, it should be understood that this is done for illustrative purposes only. A person skilled in the relevant art will recognize that other steps, configurations and arrangements can be used without departing from the spirit and scope of the present invention.

FIG. 1 depicts an ATM-based communications network 100. Network 100 includes two local-area networks (LANs), referred to as local LAN 104 and destination LAN 106, which are coupled by a wide-area network (WAN) 102. WAN 102 is an ATM network. Local LAN 104 includes a router 116 (e.g., a router manufactured by Bay Networks). The router 116 is coupled at ATM interface 117 to port 128 on an ATM switch 108 within WAN 102 via an access circuit 120 that includes a DSU-to-CSU converter ("DSU/CSU") 112. Destination LAN 106 includes a router 118 (e.g., a switch router manufactured by Cisco). The router 118 is coupled at ATM interface 119 to port 130 on an ATM switch 110 within WAN 102 by an access circuit 122 without a DSU/CSU.

A digital service unit (DSU) is a device used in digital transmission for connecting a channel service unit (CSU) to data terminal equipment (a terminal or computer), as is also well known in the relevant arts. A DSU provides a standard interface to a user's terminal which is compatible with modems and handles such functions as signal translation, regeneration, reformatting, and timing. The transmitting portion of the DSU processes the customer's signal into bipolar pulses suitable for transmission over the digital facility. The receiving portion of the DSU is used both to extract timing information and to regenerate mark and space information from the received bipolar signal.

A channel service unit (CSU) is a type of interface device used to connect a terminal or computer to a digital medium, as is well known in the relevant arts. A CSU is provided by the communication carrier to customers who wish to use their own equipment to retime and regenerate the incoming signals. The customer must supply all of the transmit logic, receive logic, and timing recovery in order to use the CSU.

A router can have many ATM interfaces. ATM interface 117 on router 116 within local LAN 104 is connected by DSU/CSU 112 to the ATM switch 108, which includes a switch port 128. Interface 119 on router 118 within destination LAN 106 is connected to ATM switch 110. ATM switch 110 includes a switch port 130. DSU/CSU 112 is coupled to ATM switch 108 by access circuit 120 at switch port 128. Destination LAN 106 is coupled to ATM switch 110 at switch port 130 by access circuit 122. ATM interface 117 on router 116 of the local LAN 104 and ATM interface 119 on router 118 of

the destination LAN 106 in the communications network 100 depicted in FIG. 1 are schematically illustrated as templates containing information in FIGS. 2 and 3, respectively.

A VPI/VCI (“virtual circuit identifier”) value is associated with ATM interface 117 on the router of the local LAN 104, as shown in FIG. 2. A VPI/VCI value is a logical ID that defines a path of a data packet from an ATM interface on a router to a switch port on an ATM switch. A virtual circuit identifier value is similarly associated with ATM interface 119 on the router of the destination LAN 106, as shown in FIG. 3.

Within the WAN 102, ATM switch 108 and ATM switch 110 may be connected directly, or indirectly by one or more other ATM switches. For ease of discussion, ATM switches 108 and 110 are shown directly connected by a circuit 140.

In general, each LAN maintains configuration information for its components. This configuration information is generally stored either on the components themselves, or on a network management system (NMS) within or attached to the LAN. When a fault occurs within a LAN, that LAN’s configuration information is generally used to diagnose and correct the fault.

Compound networks such as network 100 are designed so that the WAN component is completely transparent to the LANs. The objective is to make it appear that the local and destination LANs are directly connected. One common application of this technique is to create an intranet for a company by connecting multiple LANs that are distant from one another. In the specific embodiment illustrated in FIG. 1, the ATM



interface 117 on local LAN 104 and the ATM interface 119 on destination LAN 106 are part of the same intranet or IP subnet.

One disadvantage of the conventional LAN-WAN-LAN arrangement is that problems occurring within the WAN cannot be diagnosed by the managers of the LANs because configuration information in the WAN is not available to them. WAN configuration information is generally stored either within the WAN components or within network management systems (NMSs) within or attached to the WAN. The present invention addresses this problem by collecting network component information from both LAN and WAN sources and combining this information to produce an end-to-end LAN-WAN-LAN topology of the network.

The WAN connection between access circuit 120 and access circuit 122 is often referred to as a permanent virtual circuit (PVC). Each PVC within an ATM network is identified by a pair of ATM customer switch ports and by a pair of VPI/VCI ("virtual circuit identifier") values. For example, the PVC connecting the local LAN 104 and the local LAN 106 is identified by the local ATM customer switch port 128, a local VPI/VCI value for the ATM interface 117 on router 116, a destination ATM customer switch port 130, and a destination VPI/VCI value for the ATM interface 119 on router 118. Other configuration information is available to completely define the WAN components, the ATM switch 108, and the ATM switch 110.

FIG. 4 is a flow chart depicting the topology discovery process of the present invention according to a specific embodiment. In the specific embodiment, this process

is executed by topography discovery unit (TDU) 150, which is attached to local LAN 104. An example of the structure of TDU 150 is discussed in detail below.

In step 402, TDU 150 creates a connection components template. The connection components template is an array list. That is, each entry on the list is itself an array. Data that characterize the physical devices and configuration components needed to map an end-to-end topology for an ATM-based LAN-WAN-LAN network are stored in the array. An exemplary connection components template is presented in TABLE I. Certain fields of the template are needed to aid in network address derivation and in matching the LAN data to WAN data components configured on ATM switches.

The template presented in TABLE I is the repository of information that is gathered and identified in the course of the topology discovery process. The template stores the information that is identified in the end-to-end topology from the local side of the WAN through the WAN to the destination side of the WAN.

1. Local router (hostname)
2. Local router interface IP address
3. Local router interface IP Sub Net Mask
4. Local router Interface Description
5. Local router interface protocol
6. Local router city and state
7. Local router ATM (VPI/VCI)
8. ATM switch local Access Circuit
9. ATM switch local (customer) port
10. ATM switch local port city and state
11. Local ATM (VPI/VCI)
12. Destination ATM (VPI/VCI)
13. ATM switch destination (customer ) port
14. ATM switch destination (customer) port city and state
15. ATM destination Access Circuit
16. Destination router (hostname)
17. Destination router interface description
18. Destination router interface IP address
20. Destination interface protocol
21. Destination router interface IP address
23. Destination router city and state
25. Destination router ATM (VPI/VCI)

TABLE I

5

In step 404, TDU 150 identifies all the ATM interfaces on the routers in the intranet. The ATM interfaces at each router are the end points of the end-to-end topology of the network. The database of a discovery network management system (NMS), router configurations, or direct access to MIB (management information base) objects on routers can be used to perform this identification. An example of a network management system

10

(NMS) is Hewlett Packard's Network Node Manager & OpenView products. Because not all routers may be present in the NMS database, router configuration files are used to augment this list. This ensures that routers not previously discovered by the NMS are included in the topology discovery process.

5           In step 406, TDU 150 examines each of the ATM interfaces and retrieves and stores the IP address, the subnet mask, the city, the state, and the VPI/VCI ("virtual circuit identifier") for each ATM interface, thereby creating a list of physical and logical information representing the ATM interface end points.

10           In step 408, TDU 150 uses the IP address in conjunction with the subnet mask stored for each ATM interface in the list to derive the destination IP address. TDU 150 identifies in the list the two IP addresses that are part of the same IP subnet, thereby identifying the end-point interface pair of network IP addresses. The network address at each ATM interface belongs to an IP subnet (i.e., the same intranet). Each entry on the list is augmented with corresponding values from the associated ATM interface end-  
15   point.

          Optionally, TDU 150 uses a separate auxiliary process to derive the destination IP addresses if they are not found on the list. In step 410, this auxiliary process uses the interface's IP address and subnet mask to locate the destination IP address. This is done by pinging each of the potential addresses. A router IP address that responds to the ping  
20   is the destination IP address.

Some component manufacturers do not use a standard management information base (MIB) for representing network configuration. Instead, manufacturers such as Bay Networks use a non-standard information base, referred to as a "private MIB." Because information in private MIBs does not conform to a MIB standard, ATM interface information for these devices is not accurately represented in the NMS database. For these devices, ATM interface information is obtained by accessing the MIB objects resident on the device. Configuration data for routers manufactured by Bay Networks can also be obtained from an ASCII data extract of the configuration or by router commands. In FIGS. 2 and 3, the ATM interfaces are represented schematically as templates containing information characterizing the physical and logical aspects of operation of the routers to direct and redirect data packets.

In step 412, TDU 150 identifies the virtual circuit identifier value associated with each of the pair of network IP addresses.

In step 414, TDU 150 retrieves and prepares WAN configuration data so as to permit LAN-to-WAN correlation. Specifically, the city and state are reformatted so that their values are stored in a manner that will permit comparison of a LAN city to a WAN city and a LAN state to a WAN state. The characters forming the state and city names in the list are all capitalized. The city names are further manipulated by algorithm to create a character string which limits the length of the name and which excludes certain characteristics from the name such as vowels.

In step 416, TDU 150 associates the city, state and pair of virtual circuit identifier values of the ATM interfaces on the LANs with the city, state and pair of virtual circuit identifier values on the WAN. Use of the city and state values are used only when the virtual circuit identifier values alone are not sufficient to ascertain the correct LAN to

5 WAN association.

In step 418, TDU 150 retrieves the associated configuration information and components on the WAN and stores them alongside entries in the list that correspond to the ATM interface end-points. That is, the fields of the connection components template presented in TABLE I are populated. The resultant TABLE I contains a list of data

10 entries, where the data entries indicate the physical and logical components of a LAN-WAN-LAN circuit.

TDU 150 of the present invention may be implemented using hardware, software or a combination thereof and may be implemented in a computer system or other processing system. In an illustrative embodiment, the invention is directed toward one or

15 more computer systems capable of carrying out the functionality described herein. An example computer system 500 is shown in FIG. 5. The computer system 500 includes one or more processors, such as processor 504. The processor 504 is connected to a communication bus 506. Various software embodiments are described in terms of this example computer system. After reading this description, it will become apparent to a

20 person skilled in the relevant art how to implement the invention using other computer systems and/or computer architectures.

Computer system 500 also includes a main memory 508, preferably random access memory (RAM), and can also include a secondary memory 510. The secondary memory 510 can include, for example, a hard disk drive 512 and/or a removable storage drive 514, representing a floppy disk drive, a magnetic tape drive, an optical disk drive, etc. The removable storage drive 514 reads from and/or writes to a removable storage unit 518 in a well-known manner. Removable storage unit 518 represents a floppy disk, magnetic tape, optical disk, etc. which is read by and written to by removable storage drive 514. As will be appreciated, the removable storage unit 518 includes a computer usable storage medium having stored therein computer software and/or data.

In alternative embodiments, secondary memory 510 may include other similar means for allowing computer programs or other instructions to be loaded into computer system 500. Such means can include, for example, a removable storage unit 522 and an interface 520. Examples of such include a program cartridge and cartridge interface (such as that found in video game devices), a removable memory chip (such as an EPROM, or PROM) and associated socket, and other removable storage units 522 and interfaces 520 which allow software and data to be transferred from the removable storage units to computer system 500.

Computer system 500 can also include a communications interface 524.

Communications interface 524 allows software and data to be transferred between

computer system 500 and external devices. Examples of communications interface 524 can include a modem, a network interface (such as an Ethernet card), a communications

port, a PCMCIA slot and card, etc. Software and data transferred via communications interface 524 are in the form of signals which can be electronic, electromagnetic, optical or other signals capable of being received by communications interface 524. These signals are provided to communications interface 524 via a communications path 526.

5 This communications path 526 carries signals and can be implemented using wire or cable, fiber optics, a phone line, a cellular phone link, an RF link and other communications channels.

In this document, the terms “computer program medium” and “computer usable medium” are used to generally refer to media such as removable storage device 518, a  
10 hard disk installed in hard disk drive 512, and communications path 526. These computer program products are means for providing software to computer system 500.

Computer programs (also called computer control logic) are stored in main memory 508 and/or secondary memory 510. Computer programs can also be received via communications interface 524. Such computer programs, when executed, enable the  
15 computer system 500 to perform the features of the present invention as discussed herein. In particular, the computer programs, when executed, enable the processor 504 to perform the features of the present invention. Accordingly, such computer programs represent controllers of the computer system 500.

In an embodiment where the invention is implemented using software, the  
20 software may be stored in a computer program product and loaded into computer system 500 using removable storage drive 514, hard drive 512 or communications interface 524.



The control logic (software), when executed by the processor 504, causes the processor 504 to perform the functions of the invention as described herein.

In another embodiment, the invention is implemented primarily in hardware using, for example, hardware components such as application specific integrated circuits (ASICs). Implementation of the hardware state machine so as to perform the functions described herein will be apparent to persons skilled in the relevant art(s). In yet another embodiment, the invention is implemented using a combination of both hardware and software.

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example, and not limitation. It will be apparent to persons skilled in the relevant arts that various changes in form and detail can be made without departing from the spirit and scope of the present invention. Thus the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

**What is Claimed is:**

1           1.       A method for identifying a connection between a destination local area  
2 network (LAN) and a local LAN where said LANs are coupled by an ATM-based wide  
3 area network (WAN), wherein each of said LANs includes a router, and wherein said  
4 WAN includes at least two ATM switches, the method comprising the steps of:  
5           identifying one or more ATM interfaces on each router;  
6           retrieving and storing an IP address, a subnet mask, a city, a state, and a virtual  
7 circuit identifier from each ATM interface, thereby identifying a list of entries;  
8           using the IP address in conjunction with the subnet mask stored for each ATM  
9 interface in the list to derive a destination IP address, thereby identifying a pair of  
10 network IP addresses;  
11           identifying a virtual circuit identifier value associated with each of the pair of  
12 network IP addresses;  
13           retrieving and preparing WAN configuration data so as to permit a LAN-to-WAN  
14 correlation;  
15           associating the city, state, and pair of virtual circuit identifier values of the ATM  
16 interfaces on the LANs with the city, state and pair of virtual circuit identifier values on  
17 the WAN; and  
18           retrieving and storing the associated configuration information and components of  
19 the WAN along with the entries of the list.

1           2.       The method of claim 1, wherein identifying one or more ATM interfaces  
2   on each router comprises the step of:  
3           querying LAN management information including at least one of a network  
4   management system database, router command, router configuration files, and router  
5   management information base objects.

1           3.       The method of claim 1, wherein retrieving and storing an IP address, a  
2   subnet mask, a city, a state, and a virtual circuit identifier value from each ATM interface  
3   comprises the step of:  
4           querying LAN management information including at least one of a network  
5   management system database, router command, router configuration files, and router  
6   management information base objects.

1           4.       The method of claim 1, further comprising the step of:  
2   creating a connection components template.

1           5.       The method of claim 1, wherein:

2           said pair of network IP addresses are part of the same subnet.

1           6.       The method of claim 5, wherein using the IP address in conjunction with

2           the subnet mask stored for each ATM interface in the list to derive a destination IP

3           address comprises the step of:

4           matching pairs of IP addresses using their subnet addresses.

1           7.       A computer program product for identifying a connection between a

2           destination local area network (LAN) and a local LAN where said LANs are coupled by

3           an ATM-based wide area network (WAN), wherein each of said LANs includes a router,

4           and wherein said WAN includes at least two ATM switches, said computer program

5           product comprising:

6           a computer usable medium having computer readable program code means

7           embodied in said medium, said computer readable program code means comprising:

8           a computer readable first program code means for causing a computer to identify

9           one or more ATM interfaces on each router;

10 a computer readable second program code means for causing a computer to  
11 retrieve and store an IP address, a subnet mask, a city, a state, and a virtual circuit  
12 identifier from each ATM interface, thereby identifying a list of entries;

13 a computer readable third program code means for causing a computer to use the  
14 IP address in conjunction with the subnet mask stored for each ATM interface in the list  
15 to derive a destination IP address, thereby identifying a pair of network IP addresses;

16 a computer readable fourth program code means for causing a computer to  
17 identify the virtual circuit identifier value associated with each of the pair of network IP  
18 addresses;

19 a computer readable fifth program code means for causing a computer to retrieve  
20 and prepare WAN configuration data so as to permit a LAN-to-WAN correlation;

21 a computer readable sixth program code means for causing a computer to  
22 associate the city, state, and pair of virtual circuit identifier values of the ATM interface  
23 points on the LANs with the city, state and pair of virtual circuit identifier values on the  
24 WAN; and

25 a computer readable seventh program code means for causing a computer to  
26 retrieve and store the associated configuration information and components of the WAN  
27 along with the entries of the list.

1           8.       The computer program product of claim 7, wherein said computer readable  
2 first program code means comprises:

3           a computer readable program code means for causing a computer to query LAN  
4 management information including at least one of a network management system  
5 database, router command, router configuration files, and router management information  
6 base objects.

1           9.       The computer program product of claim 7, wherein said computer readable  
2 second program code means comprises:

3           a computer readable program code means for causing a computer to query LAN  
4 management information including at least one of a network management system  
5 database, router command, router configuration files, and router management information  
6 base objects.

1           10.      The computer program product of claim 7, wherein said computer readable  
2 program code means further comprises:

3           a computer readable eighth program code means for causing a computer to create  
4 a connection components template.

1           11.     The computer program product of claim 7, wherein:  
2           said pair of network IP addresses are part of the same subnet.

1           12.     The computer program product of claim 11, wherein said computer  
2     readable third program code means comprises:  
3           a computer readable program code means for causing a computer to match pairs  
4     of IP addresses using their subnet addresses.

1           13.     An apparatus for mapping a connection between a destination local area  
2     network (LAN) and a local LAN where said LANs are coupled by an ATM-based wide  
3     area network (WAN), wherein each of said LANs includes a router, and wherein said  
4     WAN includes at least two ATM switches, the apparatus comprising:  
5           means for identifying one or more ATM interfaces on each router;  
6           means for retrieving and storing an IP address, a subnet mask, a city, a state, and a  
7     virtual circuit identifier from each ATM interface, thereby identifying a list of entries;  
8           means for using the IP address in conjunction with the subnet mask stored for  
9     each ATM interface in the list to derive a destination IP address, thereby identifying a  
10    pair of network IP addresses;

11 means for identifying a virtual circuit identifier value associated with each of the  
12 pair of network IP addresses;

13 means for retrieving and preparing WAN configuration data so as to permit a  
14 LAN-to-WAN correlation;

15 means for associating the city, state, and pair of virtual circuit identifier values of  
16 the ATM interfaces on the LANs with the city, state and pair of virtual circuit identifier  
17 values on the WAN; and

18 means for retrieving and storing the associated configuration information and  
19 components of the WAN along with the entries of the list.

1 14. The apparatus of claim 13, wherein said means for identifying one or more

2 ATM interfaces on each router comprises:

3 means for querying LAN management information including at least one of a  
4 network management system database, router command, router configuration files, and  
5 router management information base objects.

1 15. The apparatus of claim 13, wherein said means for retrieving and storing

2 an IP address, a subnet mask, a city, a state, and a virtual circuit identifier value from

3 each ATM interface comprises:



4 means for querying LAN management information including at least one of a  
5 network management system database, router command, router configuration files, and  
6 router management information base objects.

1 16. The apparatus of claim 13, further comprising:  
2 means for creating a connection components template.

1 17. The apparatus of claim 13, wherein:  
2 said pair of network IP addresses are part of the same subnet.

1 18. The apparatus of claim 17, wherein said means for using the IP address in  
2 conjunction with the subnet mask stored for each ATM interface in the list to derive a  
3 destination IP address comprises:  
4 means for matching pairs of IP addresses using their subnet addresses.

**Abstract**

A destination local area network (LAN) and a local LAN are coupled by an ATM-based wide area network (WAN). Each LAN includes a router. The WAN includes at least two ATM switches having switch ports. In order to identify and map a connection between the destination LAN and the local LAN, an end-to-end LAN-WAN-LAN connection components template is created. The template contains a number of fields which are populated during the course of identifying the connection. ATM interfaces are identified on each router. The network addresses conform to Internet Protocol (IP) and are part of the same subnet. The IP address, IP subnet mask, city, state and the VPI/VCI (“virtual circuit identifier”) value are retrieved from each of the ATM interfaces, and those values are stored to create a list describing the physical and logical characteristics of the ATM interface. A pair of network addresses is identified using the IP address in conjunction with the subnet mask stored for each ATM interface in the list. The virtual circuit identifier values associated with each of the network IP addresses are identified. WAN configuration data are retrieved and prepared so as to permit LAN to WAN correlation. The city, state and pair of virtual circuit identifier values of the ATM interfaces on the LANs are associated with the city, state and pair of virtual circuit identifier values on the WAN. The associated configuration information and components of the WAN are retrieved and stored alongside entries in the list.

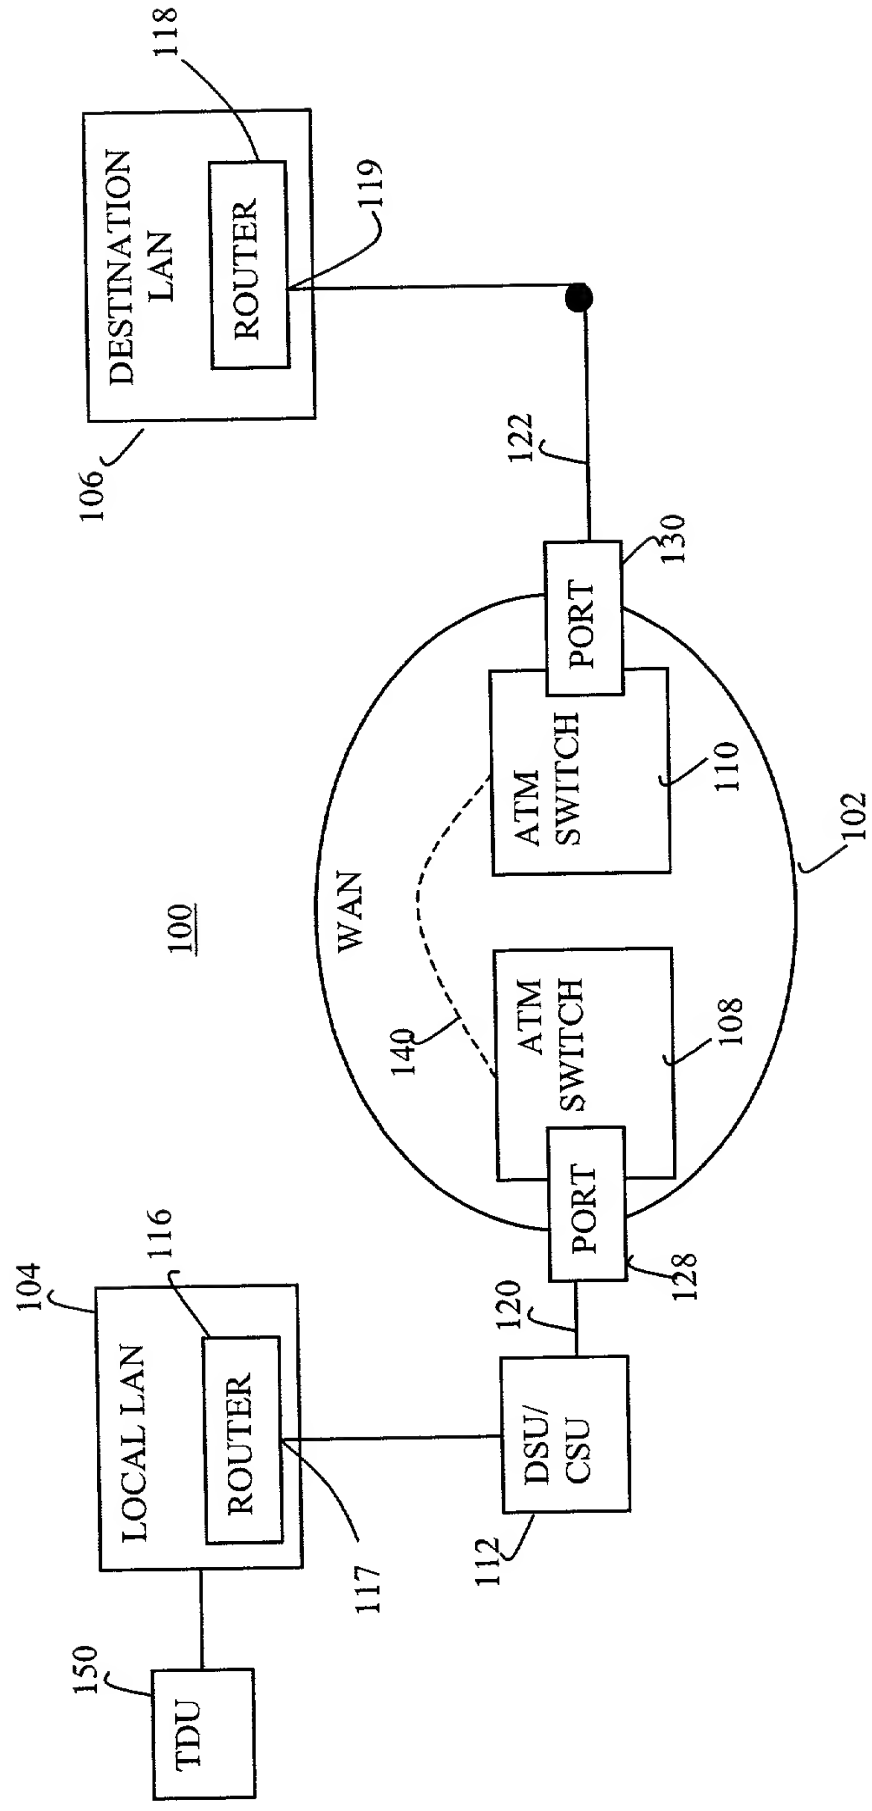


FIG. 1

Source CPE router
Router C01GWR20
Configuration:
IP 192.168.96.210
ATM 0.1
VPI/VCI 1/551

117

FIG. 2

Dest CPE Switch Router
Configuration:
IP 192.168.96.209
intf ATM 1/3.3
VPI/VCI 1/158

119

FIG. 3

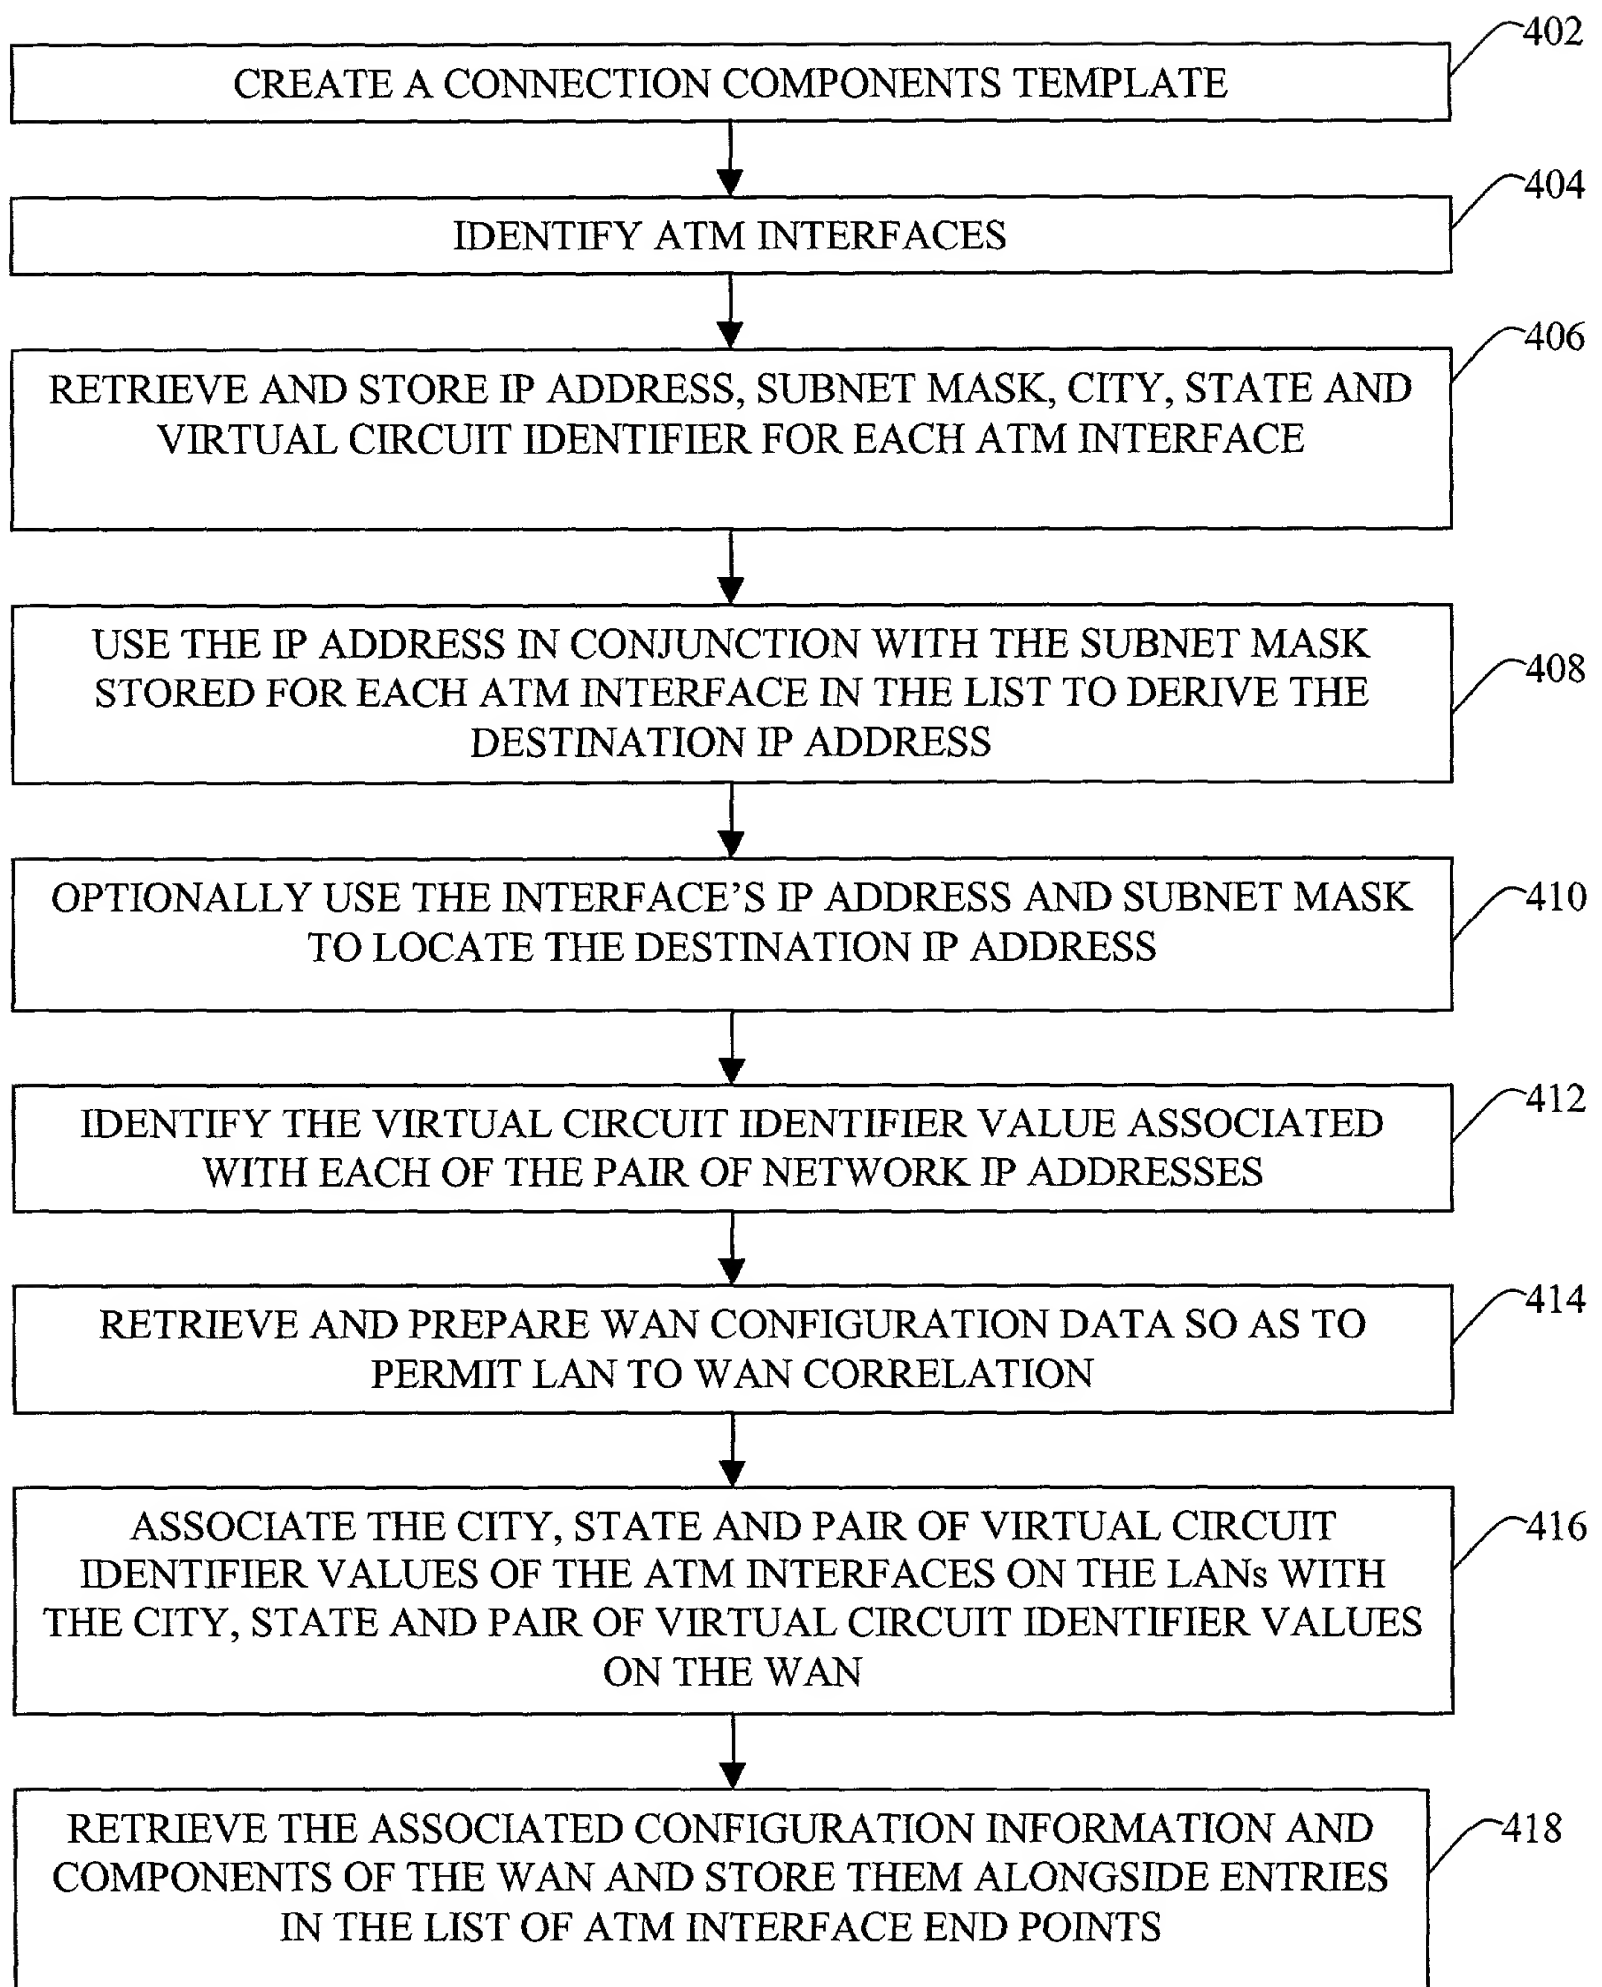


FIG. 4

COMPUTER SYSTEM 500

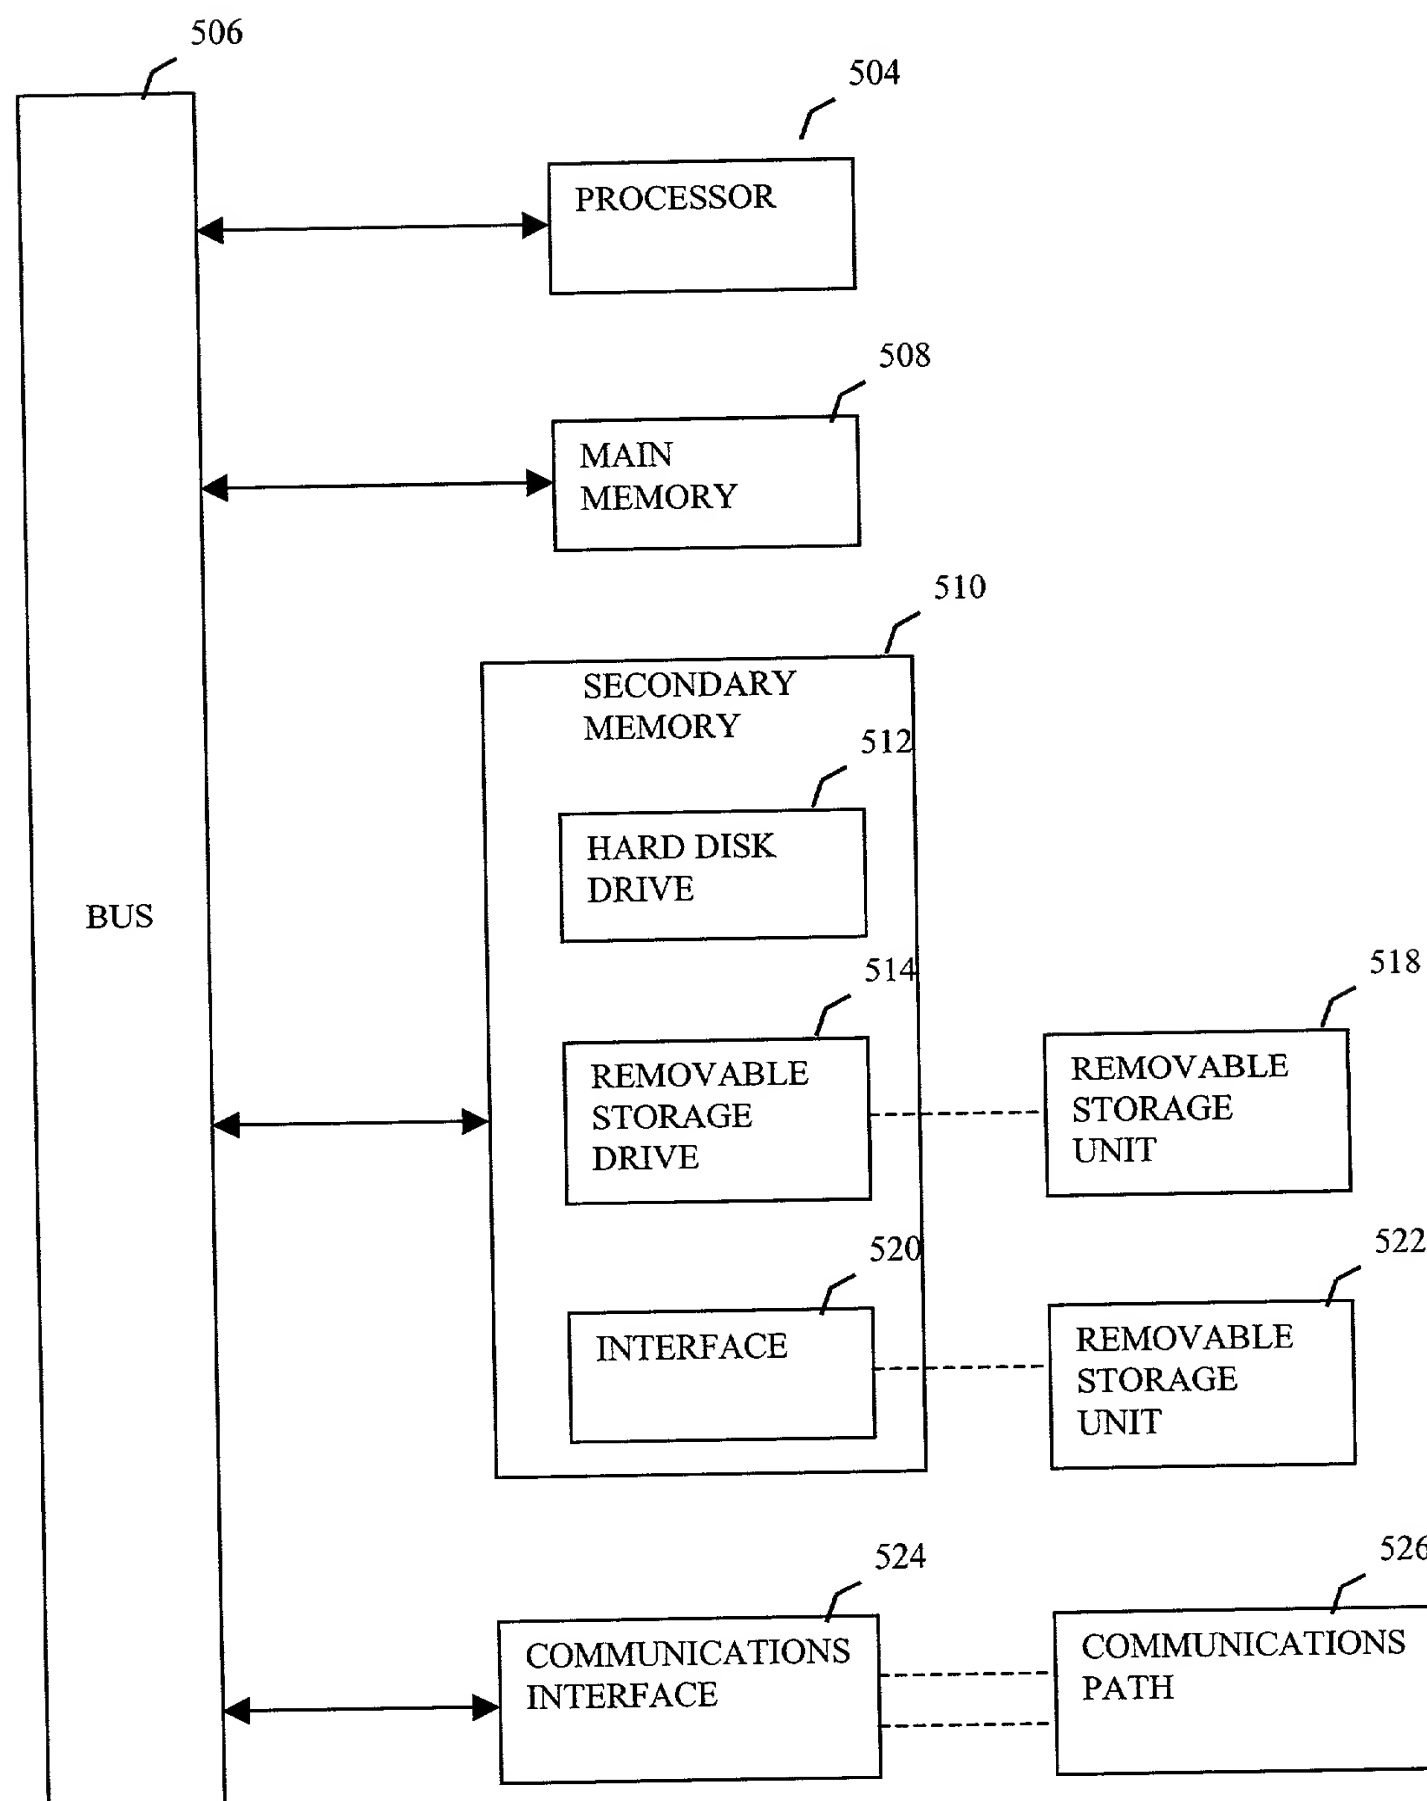


FIG. 5

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

**Declaration and Power of Attorney**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Configuration Mapping In An ATM-Based Wide Area Network**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 (a-d) or 365(a-b) of any PCT or foreign application(s) for patent or inventors' certificate listed below or priority benefits under 119(e) of any United States provisional application(s) listed below and have also identified below any foreign application for patent or inventors' certificate having a filing date before that of the application on which priority is claimed:

**None**

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, we acknowledge the duty to disclose all information known to us to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**None**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:


Samuel H. Dworetsky	(Reg. No. 27873)
Thomas A. Restaino	(Reg. No. 33444)
Cedric G. DeLaCruz	(Reg. No. 36498)
Michele L. Conover	(Reg. No. 34962)
Rohini K. Garg	(Reg. No. 45272)
Robert B. Levy	(Reg. No. 28234)
Benjamin S. Lee	(Reg. No. 42787)
Susan E. McHale	(Reg. No. 35948)
Alfred G. Steinmetz	(Reg. No. 22971)

I also appoint Christopher A. Hughes (Reg. No. 26914), John E. Hoel (Reg. No. 26279) and Christopher J. Hamaty (Reg. No. 37364) of Morgan & Finnegan as associate attorneys, with full power to prosecute said application, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

Please address all correspondence to Mr. S. H. Dworetsky, AT&T Corp., P.O. Box 4110, Middletown, New Jersey 07748. Telephone calls should be made to Alfred G. Steinmetz at 973-360-8113.

Full name of sole inventor: Barry McKay Crooks

Inventor's signature

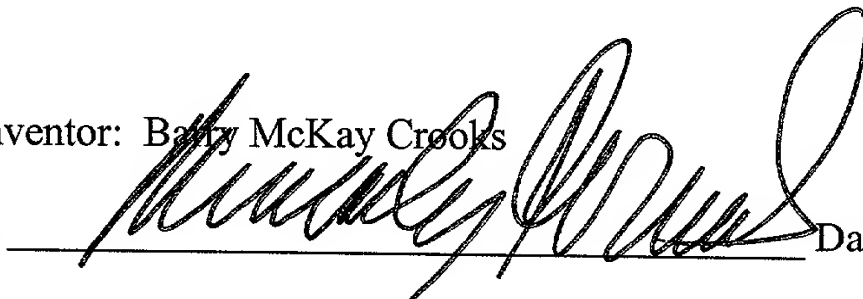

Date

3/16/2000

Residence: Maitland, Orange County, Florida

Citizenship: United States of America

Post Office Address:

1918 Benhurst Place  
Maitland, Florida 32751